

WOOD CORE RAISED ACCESS FLOORING SYSTEM

Wood Core panels consist of heavy duty composite wood core encased in galvanized formed steel. These panels have a class "A" flame spread rating and provide excellent rigidity, durability, and acoustic performance.



APPLICATIONS

Wood Core Systems meet the needs of a wide range of applications from office environments to equipment applications such as data centers, telecommunication, and mission critical facilities.


FLOOR UNDERSTRUCTURE

Wood Core Raised Floor Systems are available with Bolted Stringer and Corner Lock [Understructure Systems](#) which can accommodate floor heights as low 3" and as high as 30".

Bolted Stringer

Stringerless Drop & Lock

Stringerless Corner Lock

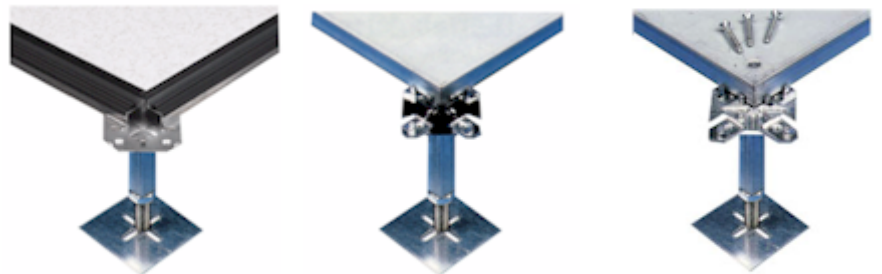

FLOOR FINISHES

Wood Core Raised Floor Systems are available in several [Floor Finishes](#) including High Pressure Laminate, Vinyl and bare steel painted finish that is suitable for carpet or rubber installations.

AIRFLOW PANELS

55% High Output

26% Standard Airflow



Wood Core Raised Floor Systems offer [Airflow Panels](#) ranging from 25% airflow to 55% airflow.

Bottom Panel View



Top Panel View

Industry Standard [Cheyenne Gray](#) Finish



Top Side Panel View




WOOD CORE PANEL LOAD RATING

| | Static | Ultimate | Ultimate | System | Rolling Load | Rolling Load |
|-------------|------------|------------|--------------|------------------------------|---------------|----------------|
| | Load (lbs) | Load (lbs) | Impact (lbs) | Weight (lb/ft ²) | 10 Pass (lbs) | 10K Pass (lbs) |
| 1000 | 1000 | 2400 | 275 | 7.4 | 1000 | 700 |
| 1250 | 1250 | 2900 | 300 | 7.6 | 1250 | 875 |
| 1500 | 1500 | 4000 | 400 | 8.3 | 1500 | 1050 |

All Flooring systems are independently tested and certified to meet the standards of PSA MOB PF2: 1992 Platform Floors (Raised Access Floors) performance specification and CISCA 2003-2004, Recommended Test Procedures for Access Floors.




Bottom Panel View

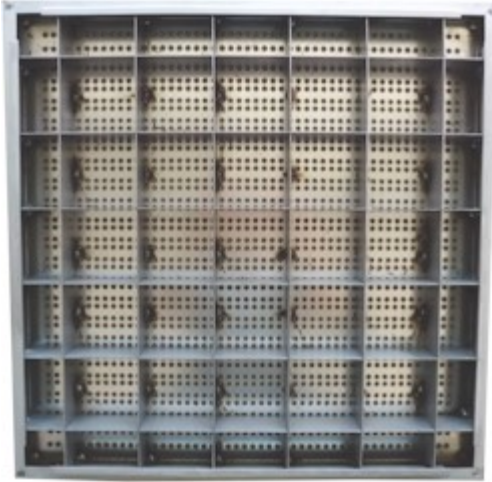

Top Panel View

Industry Standard [Cheyenne Gray](#) Finish

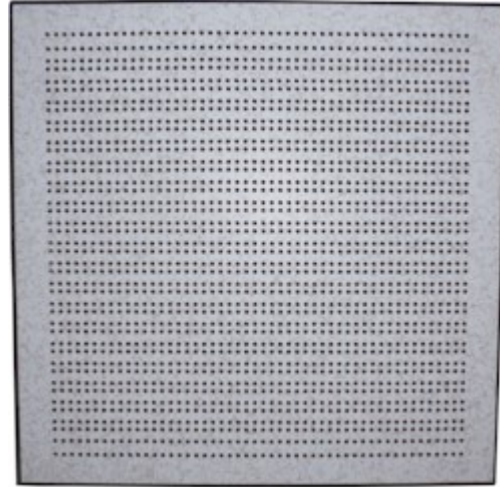

Bottom Side Panel View




STANDARD 26% AIRFLOW PANEL LOAD RATING

| | Concentrated Load | | | Impact Load (lbs) | Rolling Load 10 Pass (lbs) | Rolling Load 10K Pass (lbs) |
|-----------------------------|---------------------|-------------------------|-------------------------|-------------------|----------------------------|-----------------------------|
| | Ultimate Load (lbs) | 0.100" Deflection (lbs) | 0.080" Deflection (lbs) | | | |
| 1000 Bolted Stringer | 1000 | 1000 | 1000 | 150 | - | - |

All Flooring systems are independently tested and certified to meet the standards of PSA MOB PF2: 1992 Platform Floors (Raised Access Floors) performance specification and CISCA 2003-2004, Recommended Test Procedures for Access Floors.



Bottom Panel View

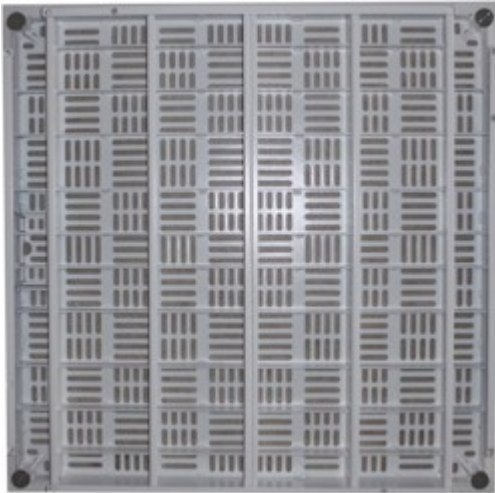

Top Panel View



Bottom Side Panel View



[Click for additional information on the 55% Universal Airgrate](#)

UNIVERSAL HIGH OUTPUT 55% AIRGRATE LOAD RATING

| | Concentrated Load | | | | |
|-------------------------------------|--------------------------|-------------------------|-------------------------|-------------------|----------------------|
| | Ultimate | 0.100" | 0.010" | Impact | Rolling Load |
| | Load (lbs) | Deflection (lbs) | Deflection (lbs) | Load (lbs) | 10 Pass (lbs) |
| 55% Airgrate Bolted Stringer | 4000 | 1500 | 1500 | 150 | 1000 |

All Flooring systems are independently tested and certified to meet the standards of PSA MOB PF2: 1992 Platform Floors (Raised Access Floors) performance specification and CISCA 2003-2004, Recommended Test Procedures for Access Floors.

